


➤ Air-injector hollow cone nozzles ITR 80




Crop production / **Ground care**

- Air-aspirating hollow cone nozzle
- Extremely low drift over the entire pressure range

Advantages

- 95/90/75/50 % drift reduction – ITR 80-01 C
- Exceptionally low-drift design
- Resistant to clogging due to round hole bore
- ISO color-coded
- Suitable for PWM

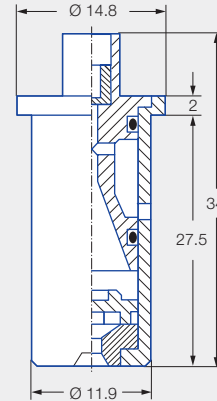

Dimensions in mm.



JKI approval as loss-reducing: 95/90/75/50 %

G 2023




Current list at:
www.lechler.com/de-en/service/loss-reducing

Series ITR 80



Injector can be removed without tools

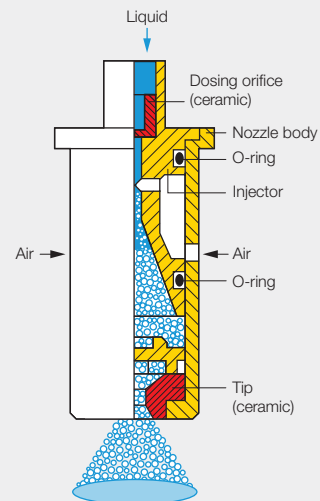

Application:



Plant protection products and growth regulators



Plant protection in viticulture, orchard and specialty crops

Technical data:



Nozzle sizes
01–02



Spray angle
80°



Material
Ceramic



Pressure ranges
3–10–30 bar



Recommended strainers
60 M 01–02








Droplet sizes
Extremely coarse – medium




Union nut
Ø 11.9 mm



		[l/min]																	
		3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	19.0	20.0	
																			
	ITR 80-01	60 M	0.39	0.45	0.51	0.55	0.60	0.64	0.68	0.72	0.75	0.78	0.82	0.85	0.88	0.91	0.93	0.99	1.01
	ITR 80-015	60 M	0.59	0.68	0.76	0.83	0.90	0.96	1.02	1.07	1.13	1.18	1.22	1.27	1.31	1.36	1.40	1.48	1.52
	ITR 80-02	60 M	0.80	0.92	1.03	1.13	1.22	1.30	1.38	1.45	1.53	1.60	1.67	1.73	1.79	1.85	1.90	2.01	2.07

- The stated l/ha values apply to water
- Check the nozzles by gauging the flow rates prior to every spraying season
- Pressure measured at the nozzle



The apps for Lechler agricultural nozzles make selection and use of the optimum nozzle even easier. Find out more here: www.lechler.com/de-en/service/apps

Good to know

You can find detailed information in our brochure "Viticulture, orchard and specialty crops" and at www.lechler-agri.com



Ordering Series + Nozzle size + Material = Order No.
 example: ITR 80 + 02 + C (Ceramic) = ITR 80-02 C

